

# CMOS Two 4-Channel Analog Multiplexer/Demultiplexer

## 1 FEATURES

- **-3dB Bandwidth: 200MHz**
- **Single Supply Operation: +2.5V to +5.5V**
- **Low ON Resistance: 53Ω(TYP) With 5V Supply**
- **High Off-Isolation: -75dB ( $R_L = 50\Omega$ ,  $f = 1MHz$ )**
- **Break-Before-Make Switching**
- **Binary Address Decoding on Chip**
- **Operating Temperature Range: -40°C to +125°C**
- **PACKAGES: SOP16, TSSOP16 and QFN3X3-16**

## 2 APPLICATIONS

- Sensors
- Analog and Digital Multiplexing and Demultiplexing
- A/D and D/A Conversion
- Signal Gating
- Battery-Operated Equipment
- Factory Automation
- Appliances
- Communications Circuits

## 3 DESCRIPTIONS

The RS2252F is a CMOS analog IC configured as two 4-channel multiplexers. This CMOS device can operate from 2.5 V to 5.5 V.

The RS2252F device are digitally-controlled analog switches. It has low on-resistance (53Ω TYP) and very low off-leakage current (1nA TYP).


The RS2252F is available in Green SOP16, TSSOP16 and QFN3X3-16 packages. It operates over an ambient temperature range of -40°C to +125°C.

**Device Information <sup>(1)</sup>**

| PART NUMBER | PACKAGE   | BODY SIZE (NOM) |
|-------------|-----------|-----------------|
| RS2252F     | SOP16     | 9.90mm×3.91mm   |
|             | TSSOP16   | 5.00mm×4.40mm   |
|             | QFN3X3-16 | 3.00mm×3.00mm   |

(1) For all available packages, see the orderable addendum at the end of the data sheet.

## 4 Functional Diagrams of RS2252F

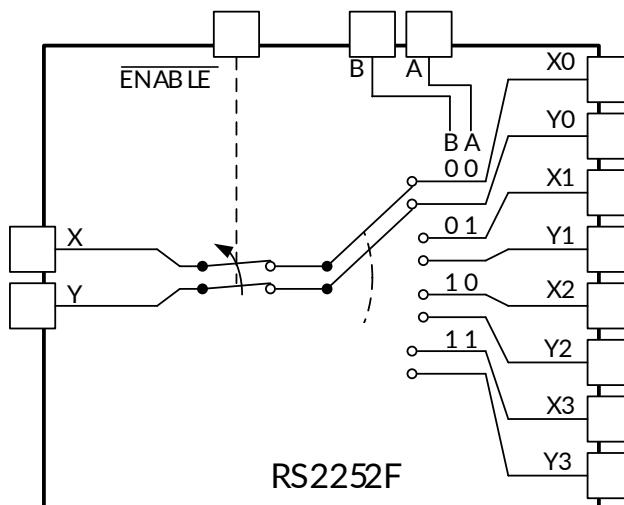

## Table of Contents

|   |    |
|---|----|
| <b>1 FEATURES .....</b>                                   | 1  |
| <b>2 APPLICATIONS .....</b>                               | 1  |
| <b>3 DESCRIPTIONS .....</b>                               | 1  |
| <b>4 Functional Diagrams of RS2252F .....</b>             | 1  |
| <b>5 Revision History .....</b>                           | 3  |
| <b>6 PACKAGE/ORDERING INFORMATION<sup>(1)</sup> .....</b> | 4  |
| <b>7 Pin Configurations (Top View) .....</b>              | 5  |
| 7.1 PIN DESCRIPTION.....                                  | 5  |
| 7.2 FUNCTION TABLE .....                                  | 5  |
| <b>8 SPECIFICATIONS.....</b>                              | 6  |
| 8.1 Absolute Maximum Ratings .....                        | 6  |
| 8.2 ESD Ratings .....                                     | 6  |
| 8.3 Recommended Operating Conditions.....                 | 6  |
| 8.4 ELECTRICAL CHARACTERISTICS .....                      | 7  |
| <b>9 TYPICAL CHARACTERISTICS.....</b>                     | 9  |
| <b>10 Parameter Measurement Information .....</b>         | 10 |
| <b>11 APPLICATION NOTES .....</b>                         | 14 |
| <b>12 PACKAGE OUTLINE DIMENSIONS .....</b>                | 15 |
| <b>13 TAPE AND REEL INFORMATION.....</b>                  | 18 |

## 5 Revision History

Note: Page numbers for previous revisions may different from page numbers in the current version.

| VERSION | Change Date | Change Item               |
|---------|-------------|---------------------------|
| A.1     | 2023/08/24  | Initial version completed |
| A.1.1   | 2024/03/08  | Modify packaging naming   |


## 6 PACKAGE/ORDERING INFORMATION <sup>(1)</sup>

| PRODUCT | ORDERING NUMBER | TEMPERATURE RANGE | PACKAGE LEAD | PACKAGE MARKING <sup>(2)</sup> | PACKAGE OPTION     |
|---------|-----------------|-------------------|--------------|--------------------------------|--------------------|
| RS2252F | RS2252FXS16     | -40°C ~+125°C     | SOP16        | RS2252                         | Tape and Reel,4000 |
|         | RS2252FXTSS16   | -40°C ~+125°C     | TSSOP16      | RS2252                         | Tape and Reel,4000 |
|         | RS2252FXTQC16   | -40°C ~+125°C     | QFN3X3-16    | RS2252                         | Tape and Reel,5000 |

NOTE:

- (1) This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the right-hand navigation.
- (2) There may be additional marking, which relates to the lot trace code information (data code and vendor code), the logo or the environmental category on the device.

## 7 Pin Configurations (Top View)

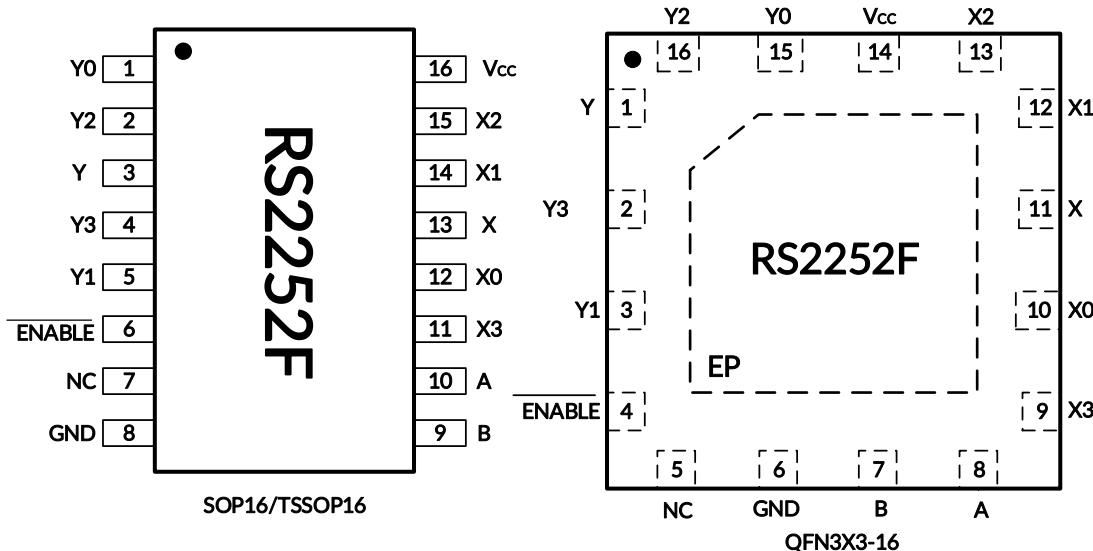

### 7.1 PIN DESCRIPTION

| NAME            | PIN           |             | FUNCTION  |
|-----------------|---------------|-------------|---|
|                 | SOP16/TSSOP16 | QFN3X3-16   |   |
| X0-X3           | 12,14,15,11   | 10,12,13,9  | Analog Switch Inputs X0-X3.                       |
| Y0-Y3           | 1,5,2,4       | 15,3,16,2   | Analog Switch Inputs Y0-Y3.                       |
| X               | 13            | 11          | Analog Switch "X" Output.                         |
| Y               | 3             | 1           | Analog Switch "Y" Output.                         |
| V <sub>CC</sub> | 16            | 14          | Positive Analog and Digital Supply Voltage Input. |
| A               | 10            | 8           | Digital Address "A" Input.                        |
| B               | 9             | 7           | Digital Address "B" Input.                        |
| GND             | 8             | 6           | Ground. Connect to digital ground.                |
| NC              | 7             | 5           | No Connect.                                       |
| <b>ENABLE</b>   | 6             | 4           | Digital Enable Input. Normally connected to GND.  |
| EP              | -             | Exposed Pad | Exposed Pad. Connect EP to GND.                   |

### 7.2 FUNCTION TABLE

| <b>ENABLE</b><br>INPUT | INPUT STATES |   | ON CHANNEL(S) |
|------------------------|--------------|---|---------------|
|                        | B            | A |               |
| 1                      | X            | X | NONE          |
| 0                      | 0            | 0 | X0, Y0        |
| 0                      | 0            | 1 | X1, Y1        |
| 0                      | 1            | 0 | X2, Y2        |
| 0                      | 1            | 1 | X3, Y3        |

X=Don't care

NOTE: Input and output pins are identical and inter-changeable. Either may be considered an input or output; signals pass equally well in either direction.

## 8 SPECIFICATIONS

### 8.1 Absolute Maximum Ratings

Over operating free-air temperature range (unless otherwise noted) <sup>(1)</sup>

| SYMBOL            | PARAMETER                                |   | MIN  | MAX                  | UNIT |
|-------------------|--|---|------|----------------------|------|
| V <sub>CC</sub>   | Supply Voltage                           |   | -0.3 | 6                    |      |
| V <sub>IN</sub>   | Input Voltage (All inputs)               |   | -0.3 | V <sub>CC</sub> +0.3 | V    |
| I <sub>IN</sub>   | Switch Input Current                     | Any one input                           | -20  | 20                   |      |
| I <sub>PEAK</sub> | Peak Switch Current                      | Pulsed at 1ms Duration, <10% Duty Cycle | -40  | 40                   | mA   |
| θ <sub>JA</sub>   | Package thermal impedance <sup>(2)</sup> | SOP16                                   |      | 150                  | °C/W |
|                   |  | TSSOP16                                 |      | 45                   |      |
|                   |  | QFN3X3-16                               |      | 70                   |      |
| T <sub>J</sub>    | Junction Temperature <sup>(3)</sup>      |   | -40  | 150                  | °C   |
| T <sub>stg</sub>  | Storage temperature                      |   | -65  | 150                  |      |

(1) Stresses above these ratings may cause permanent damage. Exposure to absolute maximum conditions for extended periods may degrade device reliability. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those specified is not implied.

(2) The package thermal impedance is calculated in accordance with JESD-51.

(3) The maximum power dissipation is a function of T<sub>J(MAX)</sub>, R<sub>θJA</sub>, and T<sub>A</sub>. The maximum allowable power dissipation at any ambient temperature is P<sub>D</sub> = (T<sub>J(MAX)</sub> - T<sub>A</sub>) / R<sub>θJA</sub>. All numbers apply for packages soldered directly onto a PCB.

### 8.2 ESD Ratings

The following ESD information is provided for handling of ESD-sensitive devices in an ESD protected area only.

|                    |                         | VALUE                      | UNIT    |
|--------------------|-------------------------|----------------------------|---------|
| V <sub>(ESD)</sub> | Electrostatic discharge | Human-body model (HBM)     | ±3000 V |
|                    |                         | Charged-device model (CDM) | ±1000 V |
|                    |                         | Machine Model (MM)         | ±200 V  |



### ESD SENSITIVITY CAUTION

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

### 8.3 Recommended Operating Conditions

Over operating free-air temperature range (unless otherwise noted)

| SYMBOL          | PARAMETER             | MIN | MAX | UNIT |
|-----------------|-----------------------|-----|-----|------|
| V <sub>CC</sub> | Supply Voltage        | 2.5 | 5.5 | V    |
| T <sub>A</sub>  | Operating temperature | -40 | 125 | °C   |

## 8.4 ELECTRICAL CHARACTERISTICS

V<sub>CC</sub> = 5.0 V or 3.3V, FULL= -40°C to +125°C, Typical values are at T<sub>A</sub> = +25°C. (unless otherwise noted)

| PARAMETER  | SYMBOL   | CONDITIONS   | V <sub>CC</sub> | T <sub>A</sub> | MIN <sup>(1)</sup> | TYP <sup>(2)</sup> | MAX <sup>(1)</sup> | UNIT |
|--|--|--|-----------------|----------------|--------------------|--------------------|--------------------|------|
| <b>ANALOG SWITCH</b>                                   |  |  |                 |                |                    |                    |                    |      |
| Analog Signal Range                                    | V <sub>X_</sub> , V <sub>X</sub><br>V <sub>Y_</sub> , V <sub>Y</sub>   |  |                 | FULL           | GND                |                    | V <sub>CC</sub>    | V    |
| On-Resistance  | R <sub>ON</sub>  | V <sub>CC</sub> =5V, I <sub>X</sub> , I <sub>Y</sub> =1mA  | 5V              | +25°C          |                    | 53                 | 60                 | Ω    |
|  |  |  |                 | FULL           |                    |                    | 77                 | Ω    |
|  |  | V <sub>CC</sub> =3.3V, I <sub>X</sub> , I <sub>Y</sub> =1mA  | 3.3V            | +25°C          |                    | 102                | 120                | Ω    |
|  |  |  |                 | FULL           |                    |                    | 140                | Ω    |
| On-Resistance Match Between Channels                   | ΔR <sub>ON</sub> <sup>(3)</sup>  | V <sub>CC</sub> =5V, I <sub>X</sub> , I <sub>Y</sub> =1mA Switch ON  | 5V              | +25°C          |                    | 1.5                | 5                  | Ω    |
| On-Resistance Flatness                                 | R <sub>FLAT(ON)</sub> <sup>(4)</sup>   | V <sub>CC</sub> =5V, I <sub>X</sub> , I <sub>Y</sub> =1mA Switch ON  | 5V              | +25°C          |                    | 23                 | 27                 | Ω    |
| X_Off, Y_Off, X Off, Y Off, X On, Y On Leakage Current | I <sub>X(OFF)</sub> ,<br>I <sub>Y(OFF)</sub> I <sub>X(OFF)</sub> ,<br>I <sub>Y(OFF)</sub><br>I <sub>X(ON)</sub> , I <sub>Y(ON)</sub> | V <sub>CC</sub> =5V, V <sub>X_</sub> , V <sub>Y_</sub> =1V, 4.5V<br>V <sub>X</sub> , V <sub>Y</sub> =4.5V, 1V<br>V <sub>CC</sub> =3.3V, V <sub>X_</sub> , V <sub>Y_</sub> =1V, 3V<br>V <sub>X</sub> , V <sub>Y</sub> =3V, 1V | 5V              | FULL           |                    | 1                  | 1000               | nA   |
| <b>DIGITAL CONTROL INPUTS <sup>(5)</sup></b>           |  |  |                 |                |                    |                    |                    |      |
| Logic Input Logic Threshold High                       | V <sub>AH</sub> , V <sub>BH</sub> ,<br>V <sub>ENABLE</sub>   |  | 5V              | FULL           | 1.8                |                    |                    | V    |
|  |  |  | 3.3V            | FULL           | 1.5                |                    |                    | V    |
| Logic Input Logic Threshold Low                        | V <sub>AL</sub> , V <sub>BL</sub> ,<br>V <sub>ENABLE</sub>   |  | 5V              | FULL           |                    |                    | 0.7                | V    |
|  |  |  | 3.3V            | FULL           |                    |                    | 0.5                | V    |
| Input-Current High                                     | I <sub>AH</sub> , I <sub>BH</sub> ,<br>I <sub>ENABLE</sub>   | V <sub>A</sub> , V <sub>B</sub> , V <sub>ENABLE</sub> = V <sub>CC</sub>  | 3.3V to 5V      | +25°C          |                    | 1                  | 1000               | nA   |
|  |  |  |                 | FULL           |                    |                    | 1000               |      |
| Input-Current Low                                      | I <sub>AL</sub> , I <sub>BL</sub> ,<br>I <sub>ENABLE</sub>   | V <sub>A</sub> , V <sub>B</sub> , V <sub>ENABLE</sub> = 0V   | 3.3V to 5V      | +25°C          |                    | 1                  | 1000               | nA   |
|  |  |  |                 | FULL           |                    |                    | 1000               |      |

(1) Limits are 100% production tested at 25°C. Limits over the operating temperature range are ensured through correlations using statistical quality control (SQC) method.

(2) Typical values represent the most likely parametric norm as determined at the time of characterization. Actual typical values may vary over time and will also depend on the application and configuration.

(3) This parameter is ensured by design and/or characterization and is not tested in production.

(4) Flatness is defined as the difference between the maximum and minimum values of ON-state resistance over the specified range of conditions.

(5) All unused digital inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation.


## ELECTRICAL CHARACTERISTICS (continued)

V<sub>CC</sub>= 5.0 V or 3.3V, FULL= -40°C to +125°C Typical values are at T<sub>A</sub> = +25°C (unless otherwise noted)

| PARAMETER                      | SYMBOL                                     | CONDITIONS   | V <sub>CC</sub> | T <sub>A</sub> | MIN | TYP   | MAX | UNIT |
|--------------------------------|--|--|-----------------|----------------|-----|-------|-----|------|
| <b>DYNAMIC CHARACTERISTICS</b> |  |  |                 |                |     |       |     |      |
| Propagation Delay              | t <sub>PD</sub>                            | R <sub>L</sub> = 300Ω, C <sub>L</sub> = 35pF,<br>See Figure 2  | 5V              | +25°C          |     | 6     |     | ns   |
|                                |  |  | 3.3V            | +25°C          |     | 8     |     | ns   |
| Address Transition Time        | t <sub>TRANS</sub>                         | V <sub>X_</sub> , V <sub>Y_</sub> = 3V/0V, R <sub>L</sub> = 300Ω,<br>C <sub>L</sub> = 35pF, See Figure 3 | 5V              | +25°C          |     | 95    |     | ns   |
|                                |  | V <sub>X_</sub> , V <sub>Y_</sub> = 3V/0V, R <sub>L</sub> = 300Ω,<br>C <sub>L</sub> = 35pF, See Figure 3 | 3.3V            | +25°C          |     | 130   |     | ns   |
| ENABLE Turn-On Time            | t <sub>ON</sub>                            | V <sub>X_</sub> , V <sub>Y_</sub> = 3V, R <sub>L</sub> = 300Ω,<br>C <sub>L</sub> = 35pF, See Figure 4    | 5V              | +25°C          |     | 70    |     | ns   |
|                                |  |  | 3.3V            | +25°C          |     | 90    |     |      |
| ENABLE Turn-Off Time           | t <sub>OFF</sub>                           | V <sub>X_</sub> , V <sub>Y_</sub> = 3V, R <sub>L</sub> = 300Ω,<br>C <sub>L</sub> = 35pF, See Figure 4    | 5V              | +25°C          |     | 100   |     | ns   |
|                                |  |  | 3.3V            | +25°C          |     | 115   |     |      |
| Break-Before-Make Time Delay   | t <sub>D</sub>                             | V <sub>X_</sub> , V <sub>Y_</sub> = 3V, R <sub>L</sub> = 300Ω,<br>C <sub>L</sub> = 35pF, See Figure 5    | 5V              | +25°C          |     | 60    |     | ns   |
|                                |  |  | 3.3V            |                |     | 70    |     | ns   |
| Charge Injection               | Q  | R <sub>S</sub> = 0Ω, C <sub>L</sub> = 1nF, See Figure 6  | 5V              | +25°C          |     | 3     |     | pC   |
|                                |  | R <sub>S</sub> = 0Ω, C <sub>L</sub> = 1nF, See Figure 6  | 3.3V            |                |     | 2.5   |     | pC   |
| Off Isolation                  | O <sub>ISO</sub>                           | R <sub>L</sub> =50Ω, f=1MHz, See Figure 7  | 5V              | +25°C          |     | -75   |     | dB   |
| Crosstalk                      | X <sub>TALK</sub>                          | f = 1MHz, See Figure 8   | 5V              | +25°C          |     | -83   |     | dB   |
| -3dB Bandwidth                 | BW   | R <sub>L</sub> = 50Ω, See Figure 9   | 5V              | +25°C          |     | 200   |     | MHz  |
|                                |  |  | 3.3V            |                |     | 200   |     | MHz  |
| Input Off-Capacitance          | C <sub>X(OFF)</sub><br>C <sub>Y(OFF)</sub> | f = 1MHz, See Figure 10  | 5V              | +25°C          |     | 3.5   |     | pF   |
| Output Off-Capacitance         | C <sub>X(OFF)</sub><br>C <sub>Y(OFF)</sub> | f = 1MHz, See Figure 10  | 5V              | +25°C          |     | 10    |     | pF   |
| Output On- Capacitance         | C <sub>X(ON)</sub><br>C <sub>Y(ON)</sub>   | f = 1MHz, See Figure 10  | 5V              | +25°C          |     | 13    |     | pF   |
| Total Harmonic Distortion      | THD  | R <sub>L</sub> = 600Ω, 4.5V <sub>P-P</sub> , f = 20Hz to 20kHz   | 5V              | +25°C          |     | 1.5   |     | %    |
| <b>POWER REQUIREMENTS</b>      |  |  |                 |                |     |       |     |      |
| Power Supply Range             | V <sub>CC</sub>                            |  |                 | FULL           | 2.5 |       | 5.5 | V    |
| Power Supply Current           | I <sub>CC</sub>                            | V <sub>CC</sub> = 5.0V, V <sub>A</sub> , V <sub>B</sub> , V <sub>ENABLE</sub> = V <sub>CC</sub> or 0     | 5V              | FULL           |     | 0.001 | 6   | uA   |
|                                |  | V <sub>CC</sub> = 3.3V, V <sub>A</sub> , V <sub>B</sub> , V <sub>ENABLE</sub> = V <sub>CC</sub> or 0     | 3.3V            | FULL           |     | 0.001 | 3   | uA   |


## 9 TYPICAL CHARACTERISTICS

NOTE: The graphs and tables provided following this note are a statistical summary based on a limited number of samples and are provided for informational purposes only.

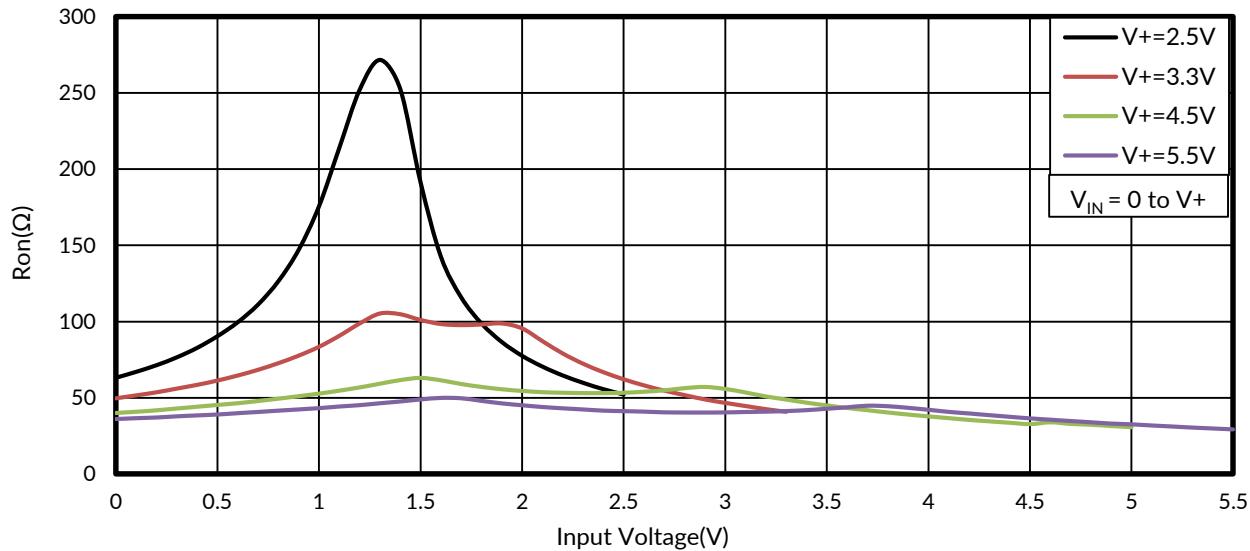


**Figure 1. Typical Ron as a Function of Input Voltage**


## 10 Parameter Measurement Information

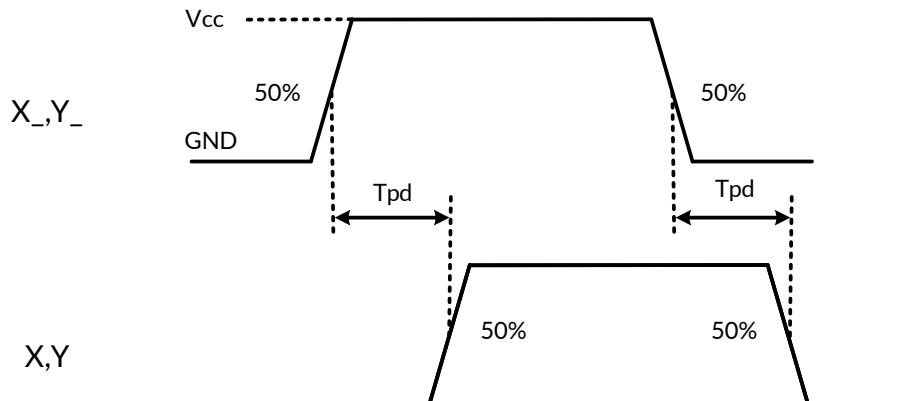

**Figure 2. Propagation Delay ( $t_{pd}$ )**

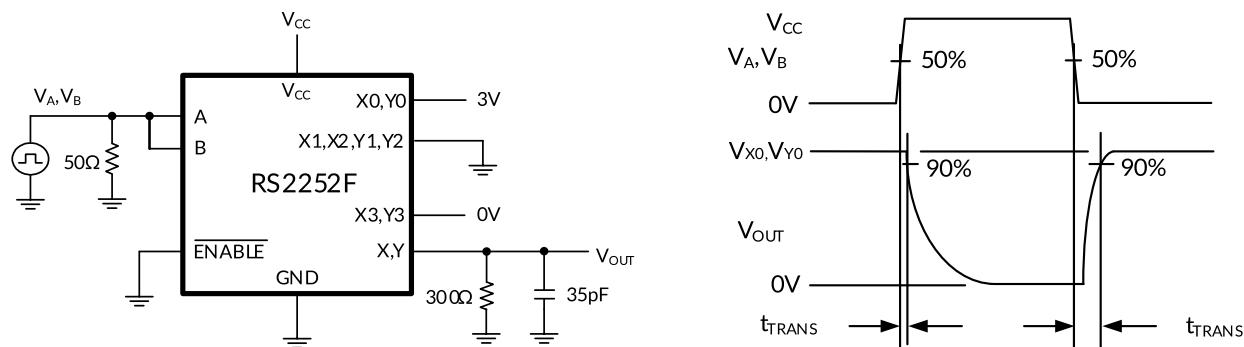


**Figure 3. Address Transition Times ( $t_{TRANS}$ )**

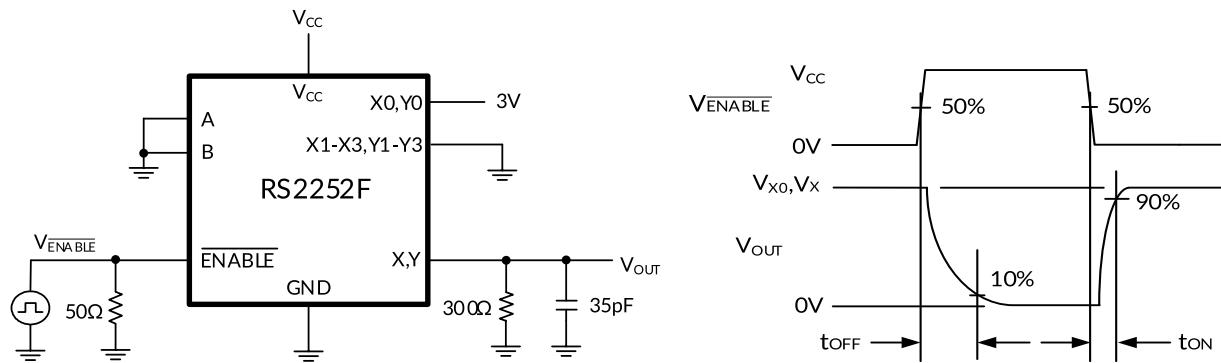


**Figure 4. Switching Times ( $t_{ON}$ ,  $t_{OFF}$ )**


## Parameter Measurement Information (continued)

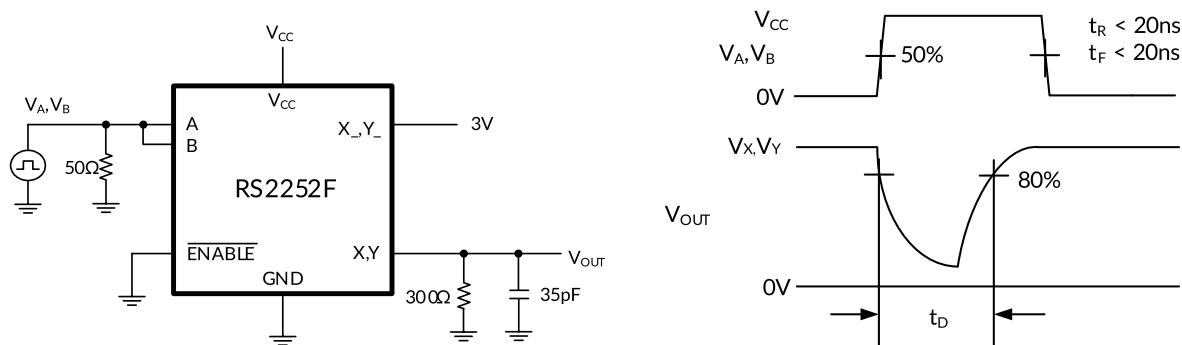

**Figure 5. Break-Before-Make Time Delay ( $t_D$ )**

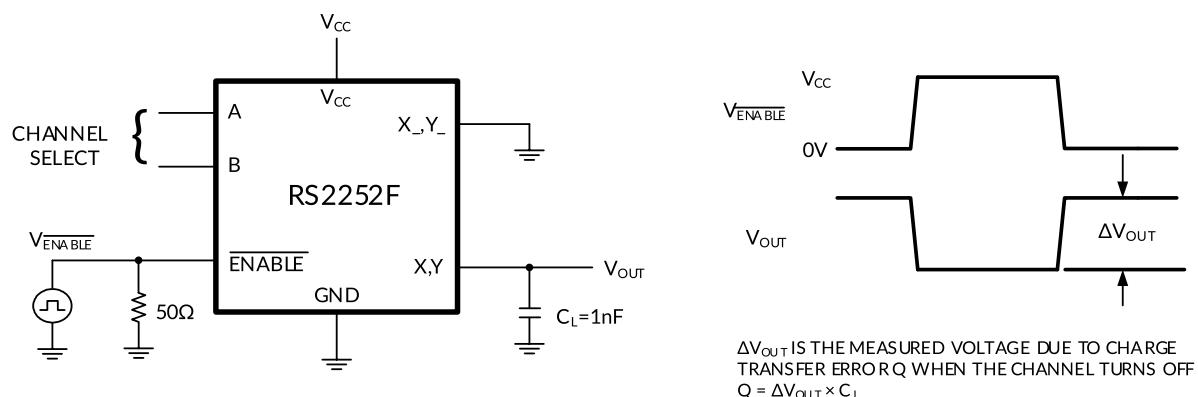


**Figure 6. Charge Injection (Q)**

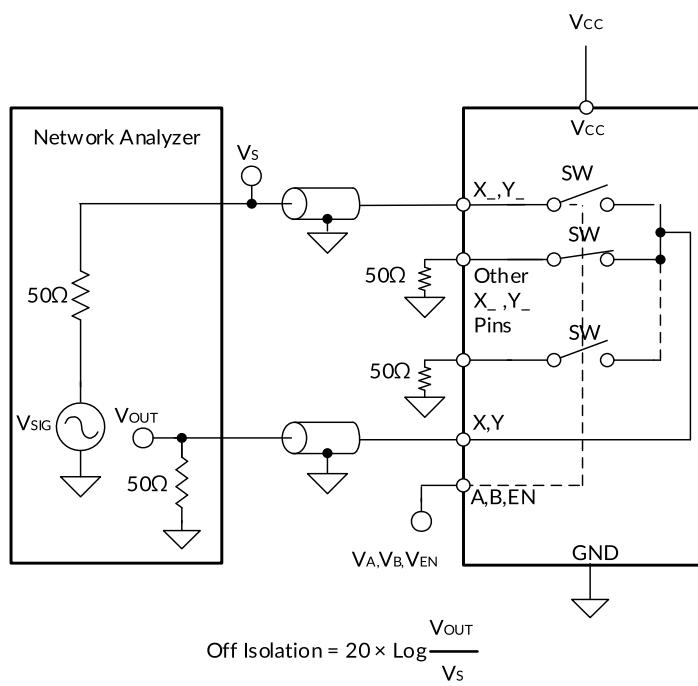


**Figure 7. Off Isolation Measurement Setup**

## Parameter Measurement Information (continued)

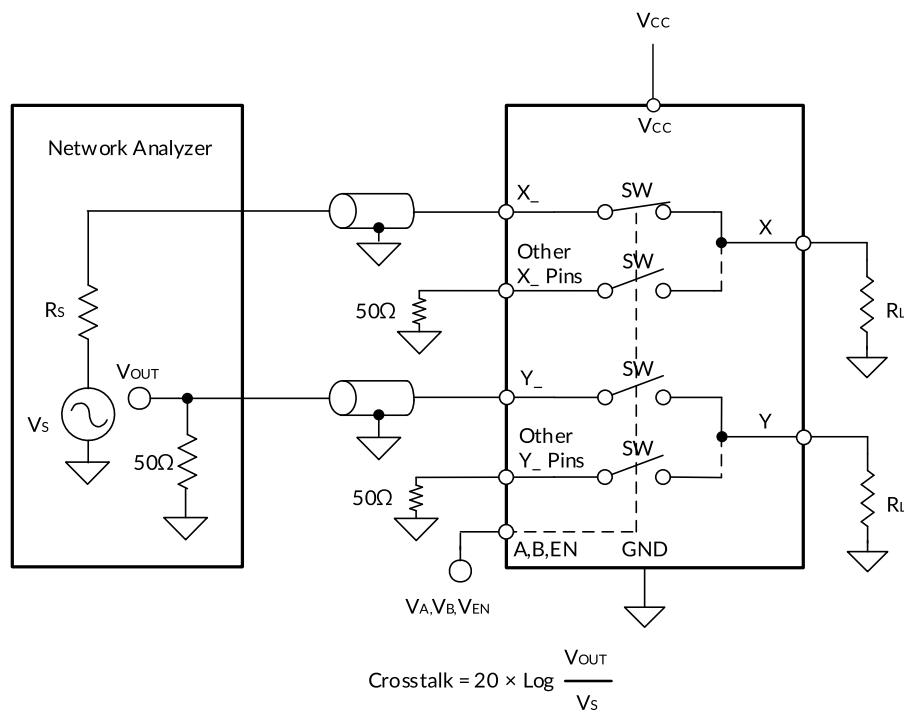


**Figure 8. Crosstalk Measurement Setup**

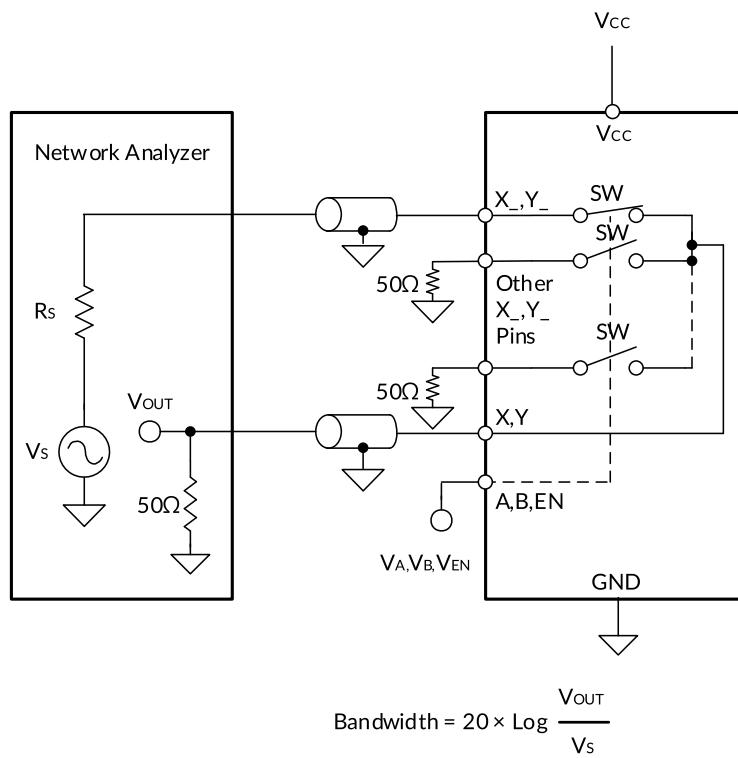

**Figure 9. Bandwidth Measurement Setup**

## Parameter Measurement Information (continued)

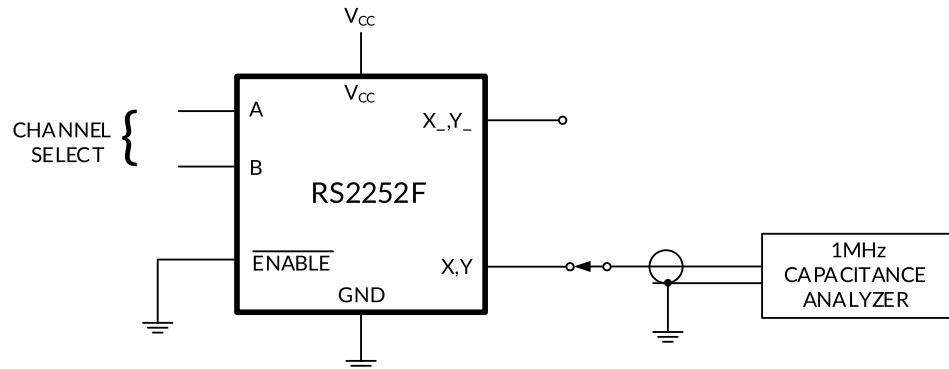


**Figure 10. Capacitance**

## 11 APPLICATION NOTES


The RS2252F device is a differential 4-channel multiplexer having two binary control inputs, A and B, and an inhibit input. The two binary input signals select 1 of 4 pairs of channels to be turned on and connect the analog inputs to the outputs.

One application of the RS2252F is to use it in conjunction with a microcontroller to poll a keypad. Figure 11 shows the basic schematic for such a polling system. The microcontroller uses the channel select pins to cycle through the different channels while reading the input to see if a user is pressing any of the keys. This is a very robust setup, allowing for multiple simultaneous key-presses with very little power consumption. It also utilizes very few pins on the microcontroller. The down side of polling is that the microcontroller must continually scan the keys for a press and can do little else during this process.

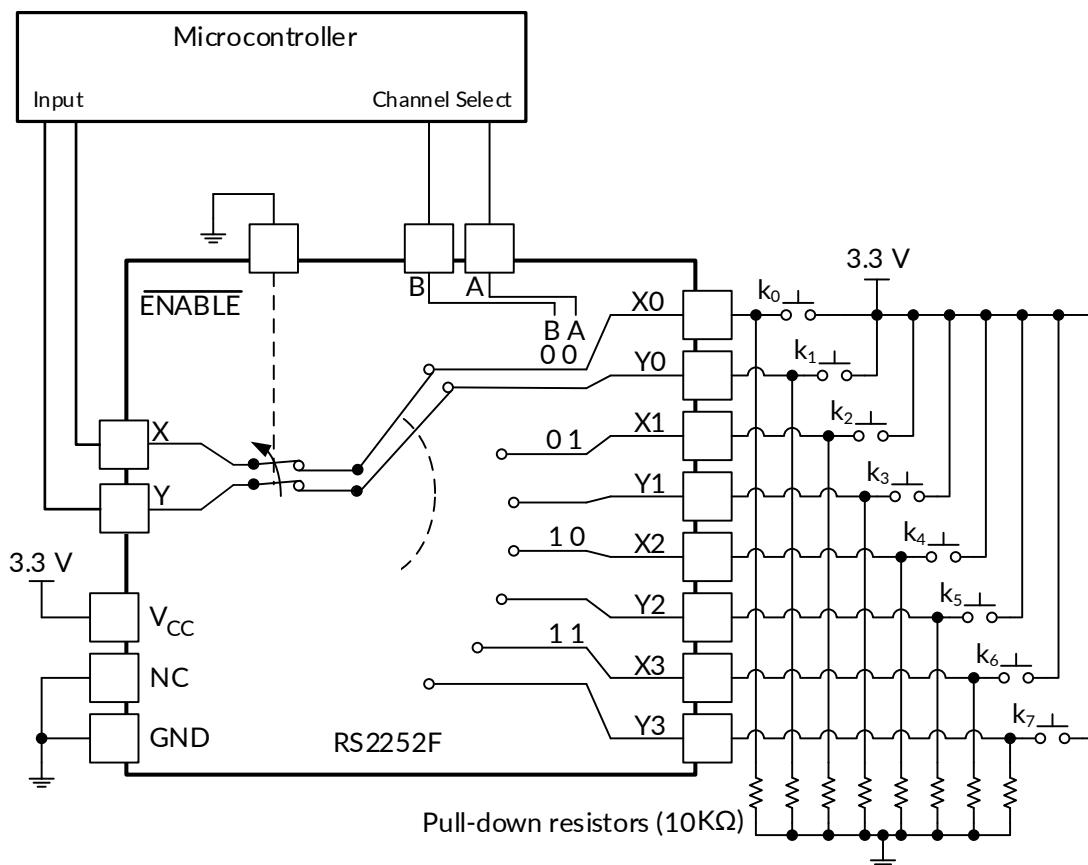


**Figure 11. The RS2252F Being Used to Help Read Button Presses on a Keypad.**

## 12 PACKAGE OUTLINE DIMENSIONS SOP16<sup>(3)</sup>

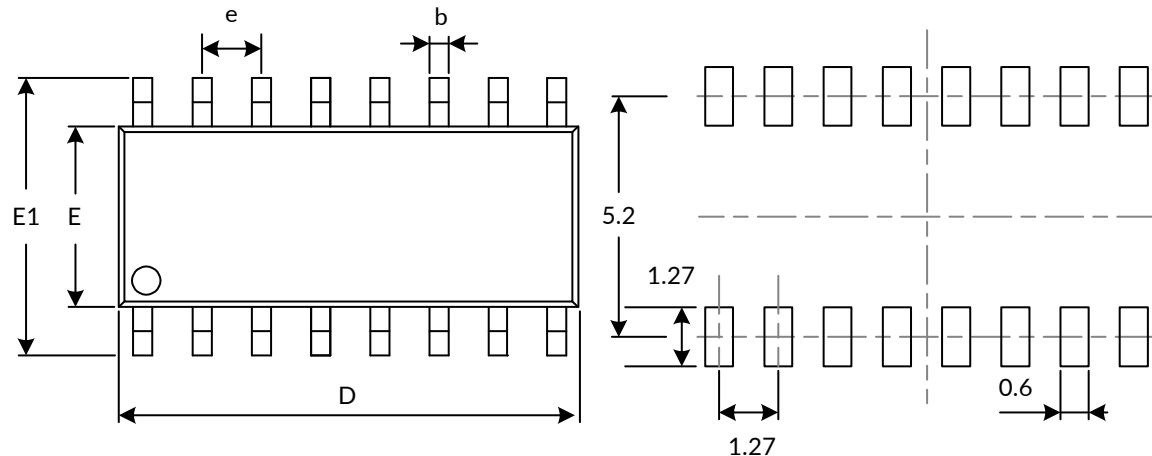

RECOMMENDED LAND PATTERN (Unit: mm)

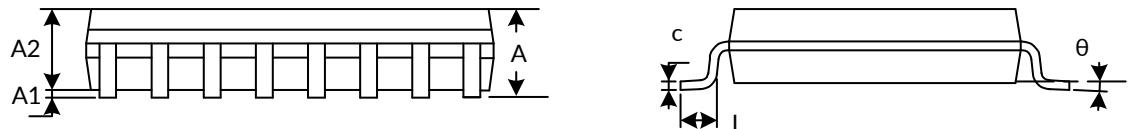


| Symbol           | Dimensions In Millimeters |        | Dimensions In Inches      |       |
|------------------|---------------------------|--------|---------------------------|-------|
|                  | Min                       | Max    | Min                       | Max   |
| A <sup>(1)</sup> | 1.350                     | 1.750  | 0.053                     | 0.069 |
| A1               | 0.100                     | 0.250  | 0.004                     | 0.010 |
| A2               | 1.350                     | 1.550  | 0.053                     | 0.061 |
| b                | 0.330                     | 0.510  | 0.013                     | 0.020 |
| c                | 0.170                     | 0.250  | 0.006                     | 0.010 |
| D <sup>(1)</sup> | 9.800                     | 10.200 | 0.386                     | 0.402 |
| E <sup>(1)</sup> | 3.800                     | 4.000  | 0.150                     | 0.157 |
| E1               | 5.800                     | 6.200  | 0.228                     | 0.244 |
| e                | 1.27(BSC) <sup>(2)</sup>  |        | 0.050(BSC) <sup>(2)</sup> |       |
| L                | 0.400                     | 1.270  | 0.016                     | 0.050 |
| θ                | 0°                        | 8°     | 0°                        | 8°    |

NOTE:

1. Plastic or metal protrusions of 0.15mm maximum per side are not included.

2. BSC (Basic Spacing between Centers), "Basic" spacing is nominal.


3. This drawing is subject to change without notice.

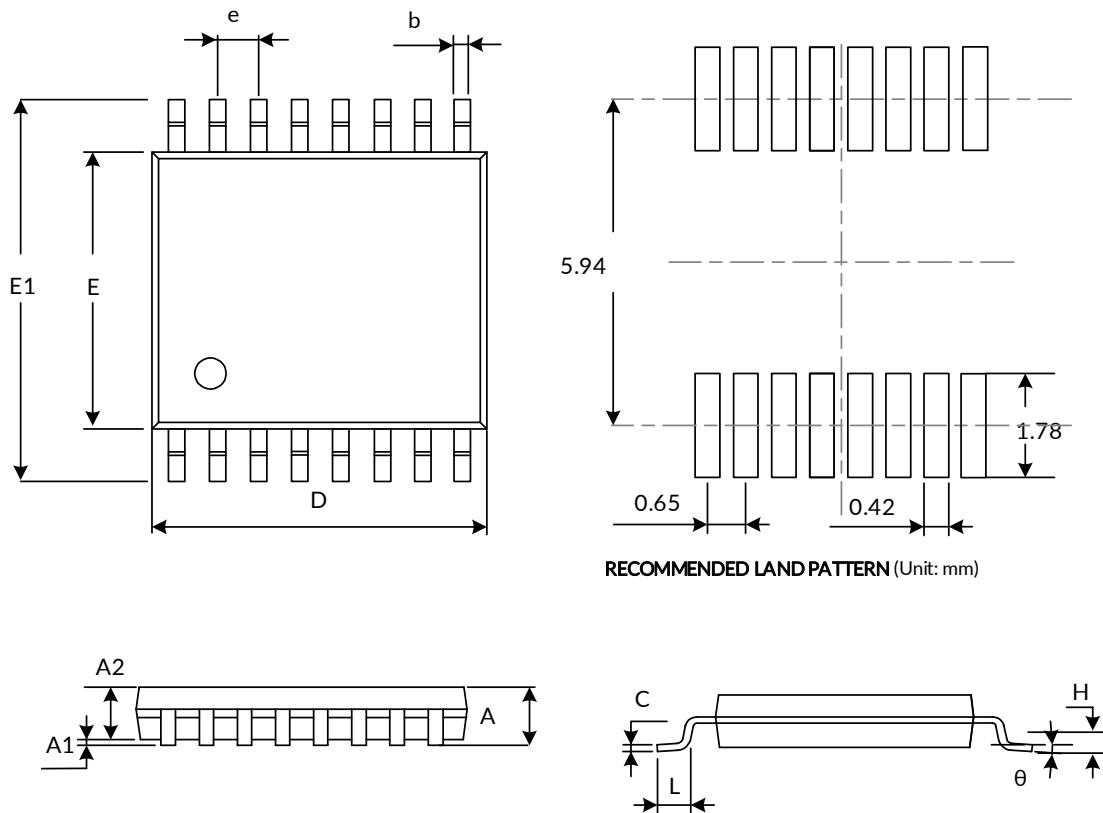**TSSOP16<sup>(3)</sup>**


| Symbol           | Dimensions In Millimeters |       | Dimensions In Inches      |       |
|------------------|---------------------------|-------|---------------------------|-------|
|                  | Min                       | Max   | Min                       | Max   |
| A <sup>(1)</sup> |                           | 1.200 |                           | 0.047 |
| A1               | 0.050                     | 0.150 | 0.002                     | 0.006 |
| A2               | 0.800                     | 1.050 | 0.031                     | 0.041 |
| b                | 0.190                     | 0.300 | 0.007                     | 0.012 |
| c                | 0.090                     | 0.200 | 0.004                     | 0.008 |
| D <sup>(1)</sup> | 4.860                     | 5.100 | 0.191                     | 0.201 |
| E <sup>(1)</sup> | 4.300                     | 4.500 | 0.169                     | 0.177 |
| E1               | 6.200                     | 6.600 | 0.244                     | 0.260 |
| e                | 0.650(BSC) <sup>(2)</sup> |       | 0.026(BSC) <sup>(2)</sup> |       |
| L                | 0.500                     | 0.700 | 0.02                      | 0.028 |
| H                | 0.25TYP                   |       | 0.01TYP                   |       |
| θ                | 1°                        | 7°    | 1°                        | 7°    |

**NOTE:**

1. Plastic or metal protrusions of 0.15mm maximum per side are not included.
2. BSC (Basic Spacing between Centers), "Basic" spacing is nominal.
3. This drawing is subject to change without notice.

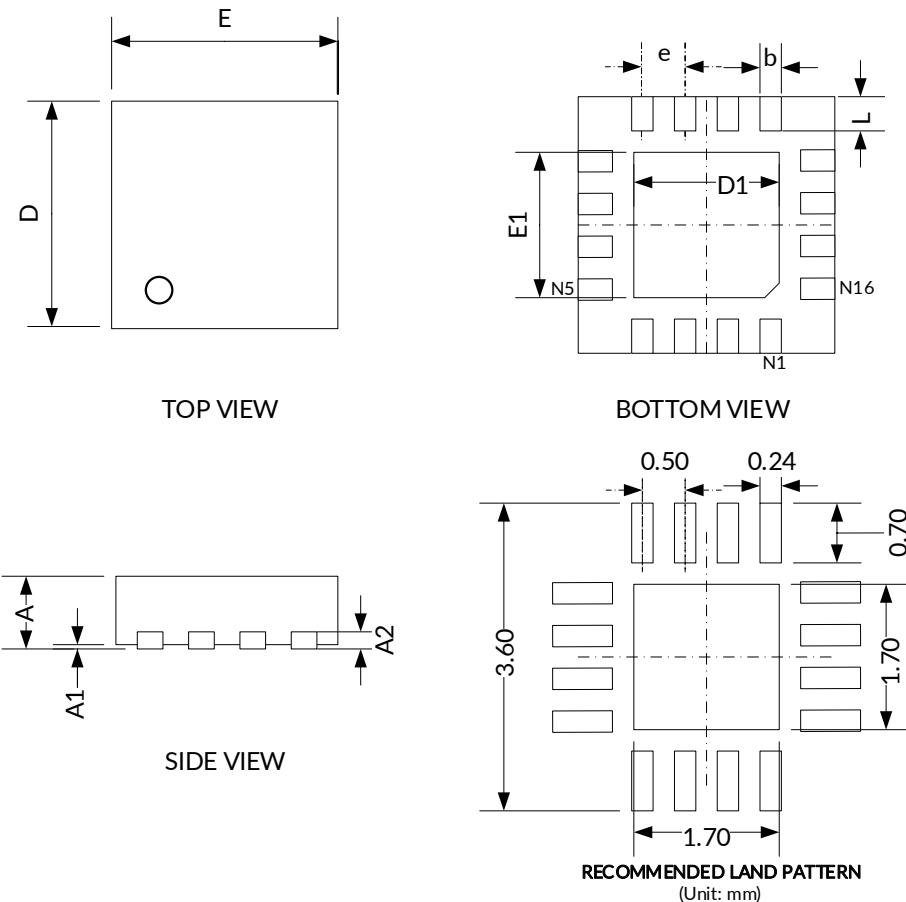**QFN3X3-16<sup>(2)</sup>**


| Symbol           | Dimensions In Millimeters |       | Dimensions In Inches |       |
|------------------|---------------------------|-------|----------------------|-------|
|                  | Min                       | Max   | Min                  | Max   |
| A <sup>(1)</sup> | 0.700                     | 0.800 | 0.028                | 0.031 |
| A1               | 0.000                     | 0.050 | 0.000                | 0.002 |
| A2               | 0.203                     |       | 0.008                |       |
| b                | 0.180                     | 0.300 | 0.007                | 0.012 |
| D <sup>(1)</sup> | 2.900                     | 3.100 | 0.114                | 0.122 |
| D1               | 1.600                     | 1.800 | 0.063                | 0.071 |
| E <sup>(1)</sup> | 2.900                     | 3.100 | 0.114                | 0.122 |
| E1               | 1.600                     | 1.800 | 0.063                | 0.071 |
| e                | 0.500 TYP                 |       | 0.020 TYP            |       |
| L                | 0.300                     | 0.500 | 0.012                | 0.020 |


**NOTE:**

1. Plastic or metal protrusions of 0.075mm maximum per side are not included.
2. This drawing is subject to change without notice.

## 13 TAPE AND REEL INFORMATION

### REEL DIMENSIONS

### TAPE DIMENSION

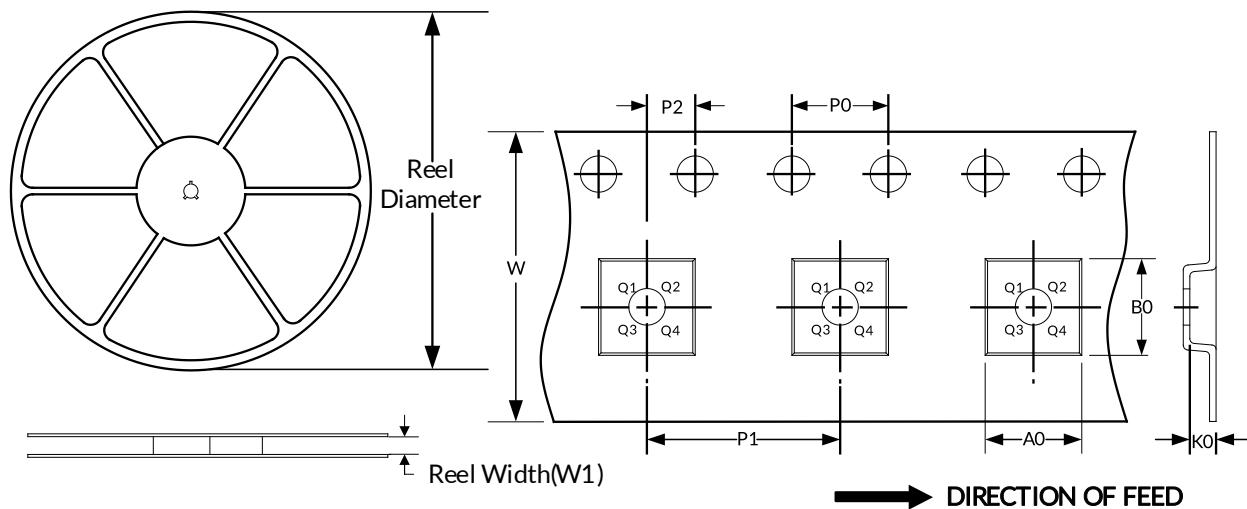

NOTE: The picture is only for reference. Please make the object as the standard.

### KEY PARAMETER LIST OF TAPE AND REEL

| Package Type | Reel Diameter | Reel Width(mm) | A0 (mm) | B0 (mm) | K0 (mm) | P0 (mm) | P1 (mm) | P2 (mm) | W (mm) | Pin1 Quadrant |
|--------------|---------------|----------------|---------|---------|---------|---------|---------|---------|--------|---------------|
| SOP16        | 13"           | 16.4           | 6.50    | 10.30   | 2.10    | 4.0     | 8.0     | 2.0     | 16.0   | Q1            |
| TSSOP16      | 13"           | 12.4           | 6.90    | 5.60    | 1.20    | 4.0     | 8.0     | 2.0     | 12.0   | Q1            |
| QFN3X3-16    | 13"           | 12.4           | 3.35    | 3.35    | 1.13    | 4.0     | 8.0     | 2.0     | 12.0   | Q1            |

NOTE:

1. All dimensions are nominal.
2. Plastic or metal protrusions of 0.15mm maximum per side are not included.

## IMPORTANT NOTICE AND DISCLAIMER

Jiangsu RUNIC Technology Co., Ltd. will accurately and reliably provide technical and reliability data (including data sheets), design resources (including reference designs), application or other design advice, WEB tools, safety information and other resources, without warranty of any defect, and will not make any express or implied warranty, including but not limited to the warranty of merchantability Implied warranty that it is suitable for a specific purpose or does not infringe the intellectual property rights of any third party.

These resources are intended for skilled developers designing with RUNIC products You will be solely responsible for: (1) Selecting the appropriate products for your application; (2) Designing, validating and testing your application; (3) Ensuring your application meets applicable standards and any other safety, security or other requirements; (4) RUNIC and the RUNIC logo are registered trademarks of RUNIC INCORPORATED. All trademarks are the property of their respective owners; (5) For change details, review the revision history included in any revised document. The resources are subject to change without notice. Our company will not be liable for the use of this product and the infringement of patents or third-party intellectual property rights due to its use.