

# RS1G17 Single Schmitt-Trigger buffer


## FEATURES

- **Operating Voltage Range:** 1.65V to 5.5V
- **Low Power Consumption:** 1 $\mu$ A (Max)
- **Operating Temperature Range:**  
-40°C to +125°C
- **Input Accept Voltage to 5.5V**
- **High Output Drive:**  $\pm 24\text{mA}$  at  $V_{CC}=3.0\text{V}$
- **I<sub>off</sub> Supports Partial-Power-Down Mode Operation**
- **Micro SIZE PACKAGES:** SOT23-5, SC70-5

## APPLICATIONS

- AC Receiver and
- Home Theaters
- Blu-ray Players and Home Theaters
- Desktops or Notebook PCs
- Digital Video Cameras (DVC)
- Mobile Phones
- Personal Navigation Device (GPS)
- Portable Media Player

## Functional Block Diagram



## DESCRIPTION

The RS1G17 Single Schmitt-trigger buffer is designed for 1.65V to 5.5V  $V_{CC}$  operation.

The RS1G17 device contains one buffer and performs the Boolean function  $Y=A$ . The device functions as an independent buffer with Schmitt-trigger inputs, so the device has different input threshold levels for positive-going ( $V_{T+}$ ) and negative going ( $V_{T-}$ ) signals to provide hysteresis( $\Delta V_T$ ) which makes the device tolerant to slow or noisy input signals.

This device is fully specified for partial-power-down applications using  $I_{off}$ . The  $I_{off}$  circuitry disables the outputs, preventing damaging current backflow through the device when it is powered down.

The RS1G17 is available in Green SOT23-5 and SC70-5 packages. It operates over an ambient temperature range of -40°C to +125°C.

## Device Information <sup>(1)</sup>

PART NUMBER	PACKAGE	BODY SIZE (NOM)
RS1G17	SOT23-5(5)	2.92mm×1.60mm
	SC70-5(5)	2.10mm×1.25mm

(1) For all available packages, see the orderable addendum at the end of the data sheet.

## FUNCTION TABLE

INPUT	OUTPUT
A	Y
H	H
L	L

Y=A

H=High Voltage Level


L=Low Voltage Level

## Revision History

Note: Page numbers for previous revisions may different from page numbers in the current version.

Version	Change Date	Change Item
A.1	2021/1/26	initial version completed

## PIN CONFIGURATIONS

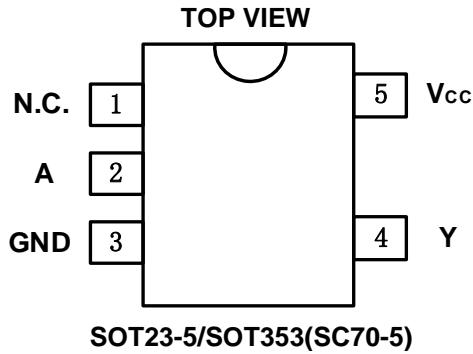

## PIN DESCRIPTION

<b>PIN</b>	<b>NAME</b>	<b>I/O TYPE</b>	<b>FUNCTION</b>
<b>SOT23-5/SOT353(SC70-5)</b>			
1	N.C.	-	Not connected
2	A	I	Input
3	GND	P	Ground
4	Y	O	Output
5	V <sub>cc</sub>	P	Power Pin

## Specifications

### Absolute Maximum Ratings <sup>(1)</sup>

over operating free-air temperature range (unless otherwise noted) <sup>(1)(2)</sup>

			<b>MIN</b>	<b>MAX</b>	<b>UNIT</b>
V <sub>CC</sub>	Supply voltage range		-0.5	6.5	V
V <sub>I</sub>	Input voltage range <sup>(2)</sup>		-0.5	6.5	V
V <sub>O</sub>	Voltage range applied to any output in the high-impedance or power-off state <sup>(2)</sup>		-0.5	6.5	V
V <sub>O</sub>	Voltage range applied to any output in the high or low state <sup>(2)(3)</sup>		-0.5	V <sub>CC</sub> +0.5	V
I <sub>IK</sub>	Input clamp current	V <sub>I</sub> <0		-50	mA
I <sub>OK</sub>	Output clamp current	V <sub>O</sub> <0		-50	mA
I <sub>O</sub>	Continuous output current			±50	mA
	Continuous current through V <sub>CC</sub> or GND			±100	mA
T <sub>J</sub>	Junction temperature			150	°C
T <sub>STG</sub>	Storage temperature		-65	150	°C

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) The input and output negative-voltage ratings may be exceeded if the input and output current ratings are observed.
- (3) The value of V<sub>CC</sub> is provided in the *Recommended Operating Conditions table*.

### ESD Ratings

		<b>VALUE</b>	<b>UNIT</b>
V <sub>(ESD)</sub>	Electrostatic discharge	Human-body model (HBM) Machine model (MM)	±8000 ±500
			V

### Thermal Information:

<b>THERMAL METRIC</b>		<b>RS1G17</b>		<b>UNIT</b>	
		<b>5PINS</b>			
		<b>SOT23-5</b>	<b>SOT353/(SC70-5)</b>		
R <sub>θJA</sub>	Junction-to-ambient thermal resistance	273.8	214.7	°C/W	
R <sub>θJC(top)</sub>	Junction-to-case(top) thermal resistance	126.8	127.1	°C/W	
R <sub>θJB</sub>	Junction-to-board thermal resistance	85.9	60.0	°C/W	
Ψ <sub>JT</sub>	Junction-to-top characterization parameter	10.9	33.4	°C/W	
Ψ <sub>JB</sub>	Junction-to-board characterization parameter	84.9	59.8	°C/W	
R <sub>θJC(bot)</sub>	Junction-to-case(bottom) thermal resistance	N/A	N/A	°C/W	

## PACKAGE/ORDERING INFORMATION

PRODUCT	ORDERING NUMBER	TEMPERATURE RANGE	PACKAGE LEAD	PACKAGE MARKING <sup>(1/2)</sup>	PACKAGE OPTION
RS1G17	RS1G17XF5	-40°C ~+125°C	SOT23-5	1G17	Tape and Reel,3000
	RS1G17XC5	-40°C ~+125°C	SC70-5(SOT353)	1G17X	Tape and Reel,3000

NOTE:

- (1) There may be additional marking, which relates to the lot trace code information(data code and vendor code), the logo or the environmental category on the device.
- (2) X = Date Code

## MARKING INFORMATION



## ELECTRICAL CHARACTERISTICS

over recommended operating free-air temperature range (Full=-40°C to +125°C, typical values are at  $T_A = +25^\circ\text{C}$ , unless otherwise noted.)<sup>(1)</sup>

### Recommended Operating Conditions

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	MAX	UNIT
Supply voltage	V <sub>cc</sub>	Operating	1.65	5.5	V
		Data retention only	1.5		
Input voltage	V <sub>I</sub>		0	5.5	V
Output voltage	V <sub>O</sub>		0	V <sub>cc</sub>	V
Operating temperature	T <sub>A</sub>		-40	+125	°C


### DC Characteristics

PARAMETER	TEST CONDITIONS	V <sub>cc</sub>	TEMP	MIN	TYP	MAX	UNIT	
V <sub>T+</sub>	Positive going input threshold voltage		Full	1.65V	0.75		1.05	
				2.3V	1.25		1.55	
				3V	1.5		2.1	
				4.5V	2.3		3.0	
				5.5V	2.8		3.4	
V <sub>T-</sub>	Negative going input threshold voltage		Full	1.65V	0.3		0.6	
				2.3V	0.35		0.65	
				3V	0.45		0.75	
				4.5V	0.7		1.0	
				5.5V	0.85		1.15	
ΔV <sub>T</sub>	Hysteresis (V <sub>T+</sub> -V <sub>T-</sub> )		Full	1.65V	0.35		0.6	
				2.3V	0.6		1.2	
				3V	1.05		1.65	
				4.5V	1.6		2.0	
				5.5V	1.95		2.25	
V <sub>OH</sub>	I <sub>OH</sub> = -100μA	1.65V to 5.5V	Full	V <sub>cc</sub> -0.1			V	
	I <sub>OH</sub> = -4mA	1.65V		1.2				
	I <sub>OH</sub> = -8mA	2.3V		1.9				
	I <sub>OH</sub> = -16mA	3V		2.4				
	I <sub>OH</sub> = -24mA			2.3				
	I <sub>OH</sub> = -32mA	4.5V		3.8				
V <sub>OL</sub>	I <sub>OL</sub> = 100μA	1.65V to 5.5V	Full			0.1	V	
	I <sub>OL</sub> = 4mA	1.65V				0.45		
	I <sub>OL</sub> = 8mA	2.3V				0.3		
	I <sub>OL</sub> = 16mA	3V				0.4		
	I <sub>OL</sub> = 24mA					0.55		
	I <sub>OL</sub> = 32mA	4.5V				0.55		
I <sub>I</sub>	A input	V <sub>I</sub> =5.5V or GND	0V to 5.5V	+25°C	±0.1	±1	μA	
				Full		±5		
I <sub>off</sub>		V <sub>I</sub> or V <sub>O</sub> =5.5V	0	+25°C	±0.1	±1	μA	
				Full		±10		
I <sub>cc</sub>		V <sub>I</sub> =5.5V or GND, I <sub>O</sub> =0	1.65V to 5.5V	+25°C	0.1	1	μA	
				Full		10		
ΔI <sub>cc</sub>	One input at V <sub>cc</sub> -0.6V, Other inputs at V <sub>cc</sub> or GND	3V to 5.5V	Full			500	μA	

### AC Characteristics


PARAMETER	SYMBOL	TEST CONDITIONS		TEMP	MIN	TYP	MAX	UNIT
Propagation Delay	$t_{pd}$	V <sub>CC</sub> =1.8V±0.15V	C <sub>L</sub> =30pF, R <sub>L</sub> =500Ω	Full		21		ns
		V <sub>CC</sub> =2.5V±0.2V	C <sub>L</sub> =30pF, R <sub>L</sub> =500Ω	Full		7.8		
		V <sub>CC</sub> =3.3V±0.3V	C <sub>L</sub> =50pF, R <sub>L</sub> =500Ω	Full		5.7		
		V <sub>CC</sub> =5V±0.5V	C <sub>L</sub> =50pF, R <sub>L</sub> =500Ω	Full		4.2		
Input Capacitance	C <sub>i</sub>	V <sub>CC</sub> =3.3V	V <sub>i</sub> =V <sub>CC</sub> or GND	+25°C		4		pF
Power dissipation capacitance	C <sub>pd</sub>	V <sub>CC</sub> =1.8V	f=10MHz	+25°C		21		pF
		V <sub>CC</sub> =2.5V				22		
		V <sub>CC</sub> =3.3V				22		
		V <sub>CC</sub> =5V				25		

## Parameter Measurement Information

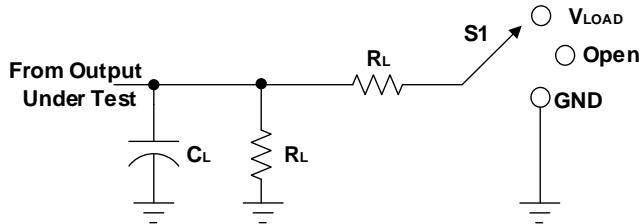

TEST	S1
$t_{PLH}/t_{PHL}$	Open
$t_{PIZ}/t_{PZL}$	$V_{LOAD}$
$t_{PHZ}/t_{PZH}$	GND

V <sub>cc</sub>	INPUTS		V <sub>M</sub>	V <sub>LOAD</sub>	C <sub>L</sub>	R <sub>L</sub>	V <sub>Δ</sub>
	V <sub>I</sub>	t <sub>r</sub> /t <sub>f</sub>					
1.8V±0.15V	V <sub>cc</sub>	≤2ns	V <sub>cc</sub> /2	2 x V <sub>cc</sub>	15pF	1MΩ	0.15V
2.5V±0.2V	V <sub>cc</sub>	≤2ns	V <sub>cc</sub> /2	2 x V <sub>cc</sub>	15pF	1MΩ	0.15V
3.3V±0.3V	3V	≤2.5ns	1.5V	6V	15pF	1MΩ	0.3V
5V±0.5V	V <sub>cc</sub>	≤2.5ns	V <sub>cc</sub> /2	2 x V <sub>cc</sub>	15pF	1MΩ	0.3V

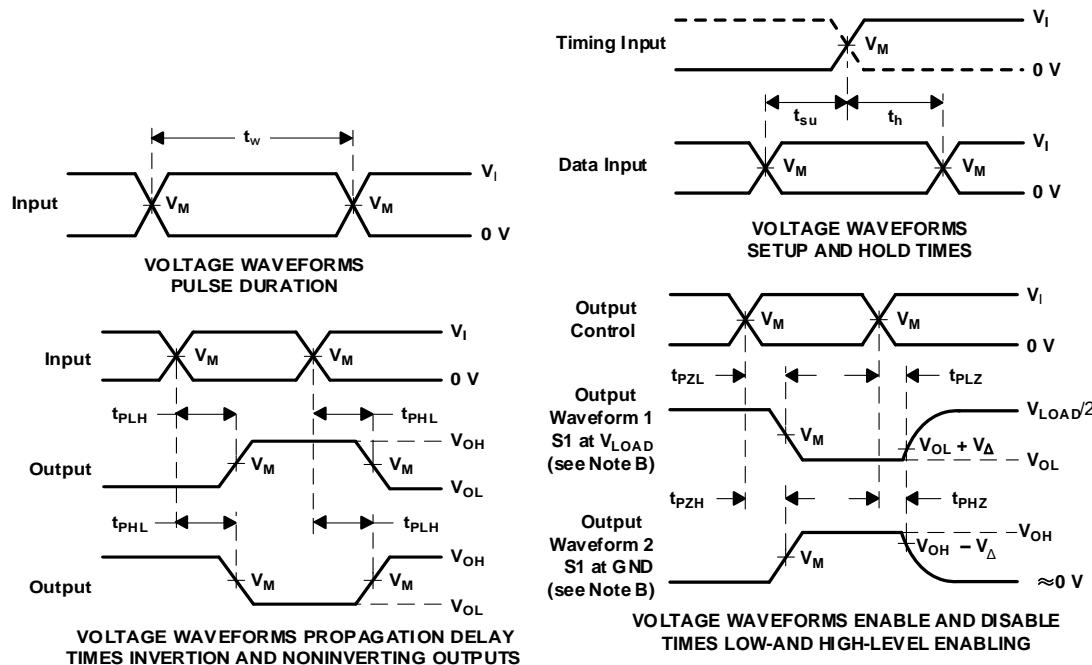


NOTES: A. C<sub>L</sub> includes probe and jig capacitance.

- B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
- C. All input pulses are supplied by generators having the following characteristics: PRR ≤ 10 MHz, Z<sub>O</sub> = 50 Ω.
- D. The outputs are measured one at a time, with one transition per measurement.
- E. t<sub>PLZ</sub> and t<sub>PHZ</sub> are the same as t<sub>dis</sub>.
- F. t<sub>PZL</sub> and t<sub>PZH</sub> are the same as t<sub>en</sub>.
- G. t<sub>PLH</sub> and t<sub>PHL</sub> are the same as t<sub>pd</sub>.
- H. All parameters and waveforms are not applicable to all devices.


Figure 1. Load Circuit and Voltage Waveforms

## Parameter Measurement Information

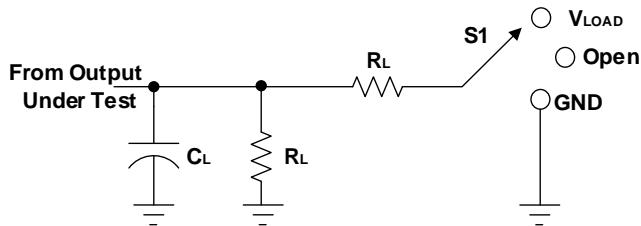

TEST	S1
$t_{PLH}/t_{PHL}$	Open
$t_{PIZ}/t_{PZL}$	$V_{LOAD}$
$t_{PHZ}/t_{PZH}$	GND

V <sub>cc</sub>	INPUTS		V <sub>M</sub>	V <sub>LOAD</sub>	C <sub>L</sub>	R <sub>L</sub>	V <sub>Δ</sub>
	V <sub>I</sub>	t <sub>r</sub> /t <sub>f</sub>					
1.8V±0.15V	V <sub>cc</sub>	≤2ns	V <sub>cc</sub> /2	2 x V <sub>cc</sub>	30pF	1kΩ	0.15V
2.5V±0.2V	V <sub>cc</sub>	≤2ns	V <sub>cc</sub> /2	2 x V <sub>cc</sub>	30pF	500Ω	0.15V
3.3V±0.3V	3V	≤2.5ns	1.5V	6V	50pF	500Ω	0.3V
5V±0.5V	V <sub>cc</sub>	≤2.5ns	V <sub>cc</sub> /2	2 x V <sub>cc</sub>	50pF	500Ω	0.3V


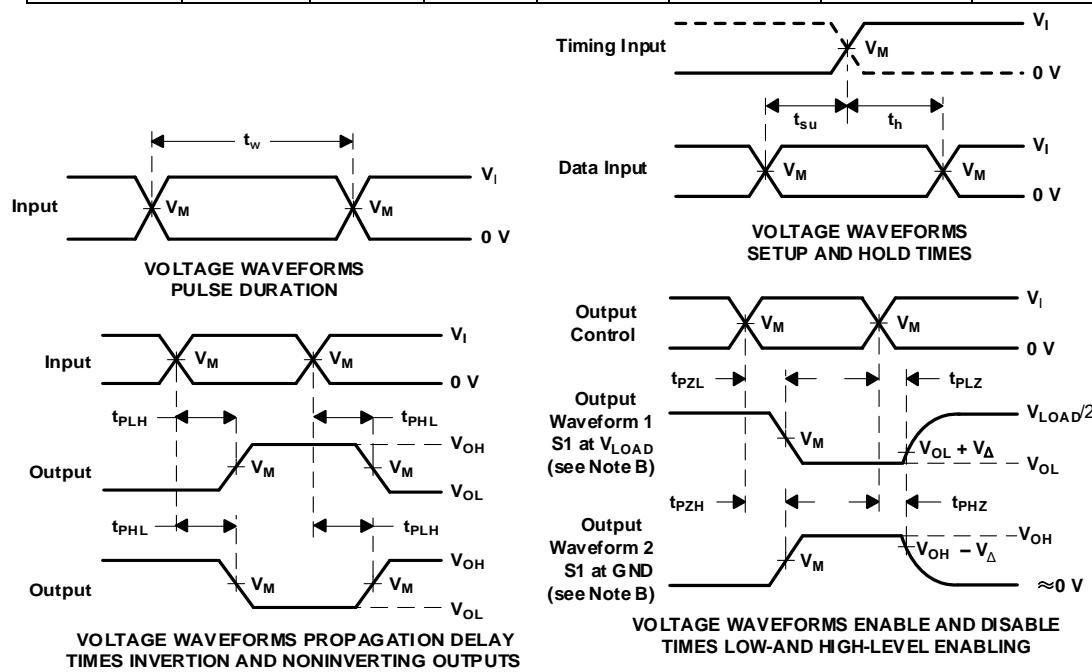


NOTES: A. C<sub>L</sub> includes probe and jig capacitance.



- B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
- C. All input pulses are supplied by generators having the following characteristics: PRR ≤ 10 MHz, Z<sub>O</sub> = 50 Ω.
- D. The outputs are measured one at a time, with one transition per measurement.
- E. t<sub>PLZ</sub> and t<sub>PHZ</sub> are the same as t<sub>dis</sub>.
- F. t<sub>PZL</sub> and t<sub>PZH</sub> are the same as t<sub>en</sub>.
- G. t<sub>PLH</sub> and t<sub>PHL</sub> are the same as t<sub>pd</sub>.
- H. All parameters and waveforms are not applicable to all devices.

Figure 2. Load Circuit and Voltage Waveforms

## PACKAGE OUTLINE DIMENSIONS SOT23-5



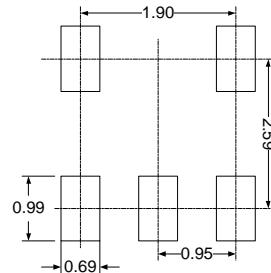
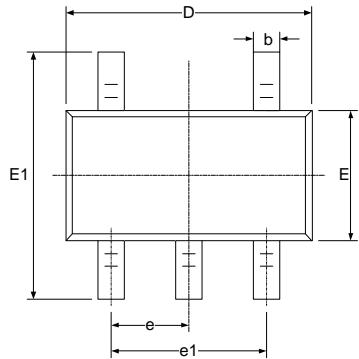


**RECOMMENDED LAND PATTERN (Unit: mm)**

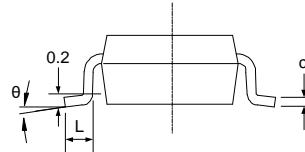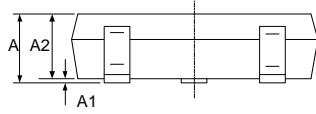

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
$\theta$	0°	8°	0°	8°

## SOT353(SC70-5)

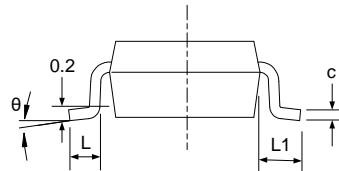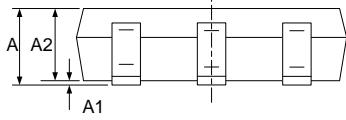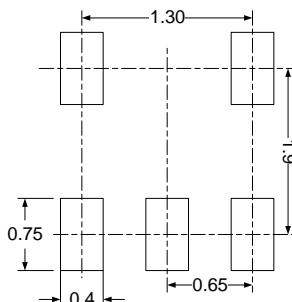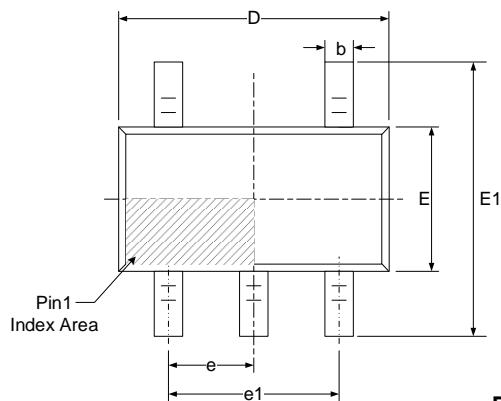

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.100	0.035	0.043
A1	0.000	0.100	0.000	0.004
A2	0.900	1.000	0.035	0.039
b	0.150	0.350	0.006	0.014
c	0.080	0.150	0.003	0.006
D	2.000	2.200	0.079	0.087
E	1.150	1.350	0.045	0.053
E1	2.150	2.450	0.085	0.096
e	0.650(BSC)		0.026(BSC)	
e1	1.300(BSC)		0.051(BSC)	
L	0.260	0.460	0.010	0.018
L1	0.525		0.021	
θ	0°	8°	0°	8°